Opening Section / Bale Opener B14 and Premixer


State-of-the-art opening technology for smaller productions

PERFECT OPENING

EFFECTIVE MIXING

- PRODUCTION UP TO 1,000 kg/h
- IDEAL COMPROMISE BETWEEN PRODUCTION, COSTS AND SPACE NEEDED

- · Suitable for processing cotton and manmade fibers up to 65 mm (2 1/2") staple length;
- frame width: 1,200 mm;
- production: up to 1,000 kg/h with manual feeding;
- the length of the feed table can be adapted to the space available;

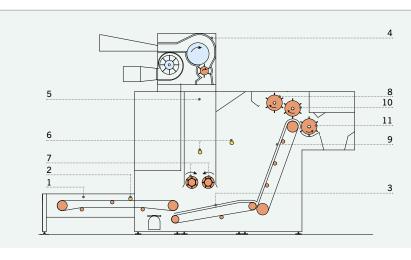


- it is advisable, from an economic point of view, to use the B14 bale opener and premixer when processing very small lots or when little space is available;
- the B14, in the version for cotton, is equipped with 11 adjustable knives grid and suction unit to eliminate the trash.

Machine description | Legend

- 1
 - Feed table Feed table photocell
- 2 3 4 5 6
 - Feed lattice Cage condenser Material reserve trunk
- Photocell
- 7 Delivery rolls
- 8 Roll clearer 9
- Spiked lattice
- 10 Evener roll 11 Stripper roll

Technical data

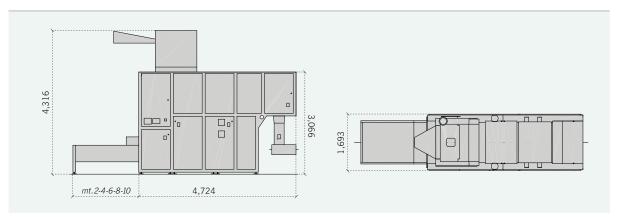

| Processed material | Cotton, man-made fibers and blends up to 1,000 kg/h. Production depending on the processed fiber |
|--------------------|--|
| Installed power | 4.43 kW |
| Weigth | 4,000 kg excluding B450L |
| | |

Power Consumption to process 100 kg of raw material 0.44 kW